


ARU 1350

The aircraft refuelling unit ARU 1350 is to be used for refuelling of aircrafts with aviation fuel from own tank. Further functions are refuelling with the own or an external pump and defuelling from the aircraft

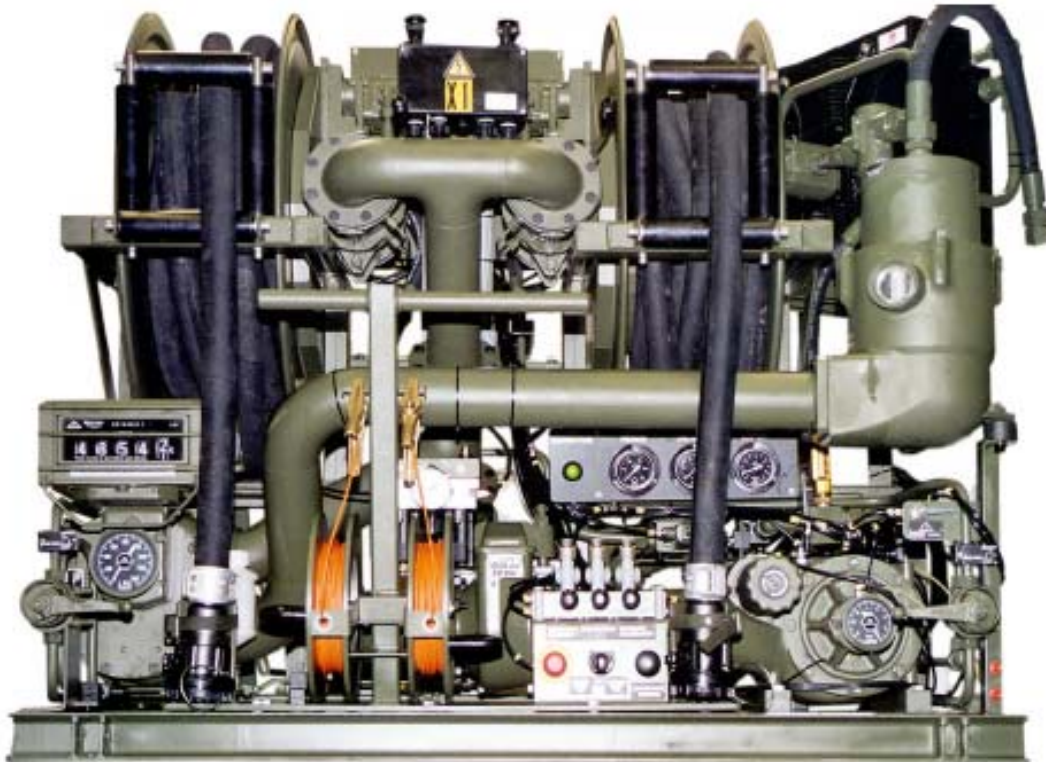

Tactical aircraft refueller for British Army

Temperature range :	-32°C to +49°C
Delivery rate refuelling :	2 x 675 l/min 1350 l/min (bulk delivery)
Nominal pressure :	10 bar
Working pressure :	4 bar
Hydraulic supply :	55 l/min at 170 bar
Dimensions (LxBxH) :	approx. 2840 x 2140 x 1640 mm
Weight :	approx. 1600 kgp
Materials :	Stainless steel (pipes), steel (frame), plastic, aluminium, brass and copper
Ex-protection area :	Zone 1, temperature class T3